


CONNECTION HEAD - type XD-AD

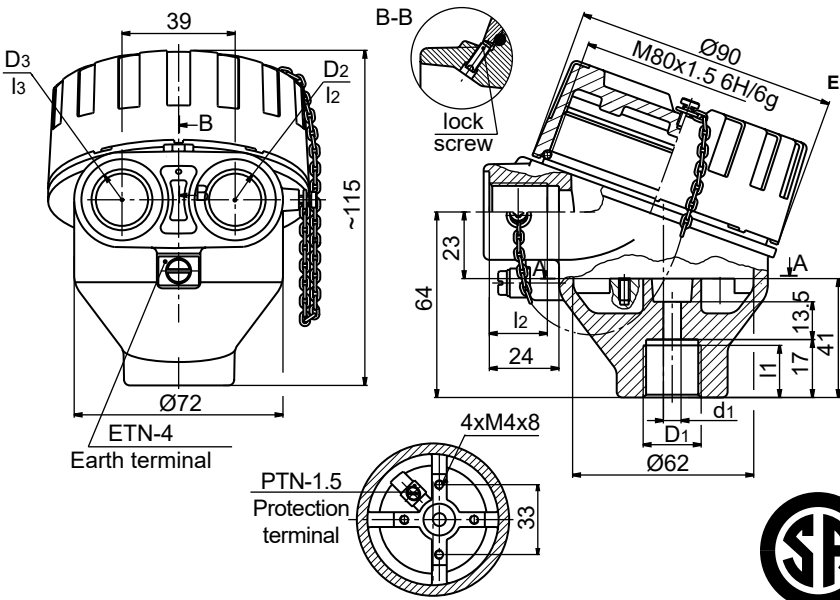

(1)	XD-AD	ORDERING CODE		SPECIFICATION
(2)	Material of elements	4		Metal parts - stainless steel; seals - silicone rubber
		5		Metal parts - stainless steel; seals - fluoroelastomer rubber
(3)	Cable gland thread D ₂ /D ₃ Please choose two variants of thread, separately for D ₂ and D ₃ For example: XD-AD-4-M2/CD...	M2		M20x1.5 6H
		N2		½NPTmod - modified ac. to FM3615 and CSA C22.2 No. 0.5
		N3		¾NPTmod - modified ac. to FM3615 and CSA C22.2 No. 0.5
		CD		CD = closed (D ₃ only)
(4)	Type of process thread D ₁	M2		M20x1.5 6H
		M24		M24x1.5 6H
		M27		M27x2 6H
		N2		½NPTmod - modified ac. to FM3615 and CSA C22.2 No. 0.5
(5)	Symbol of hole d ₁ diameter	N3		¾NPTmod - modified ac. to FM3615 and CSA C22.2 No. 0.5
		13		Ø13 or other hole on request (non flameproof)
(8)	Paint type	C		Creodur - Rafil
		SE		Spray epoxy
		SPU		Spray polyurethane on (SE) layer
(9)	Paint colour	al		alu natural colour (only Creodur - Rafil)
		yc		RAL 1007 daffodil yellow
		ys		RAL 1003 signal yellow
		bs		RAL 5005 signal blue
		sb		RAL 5015 sky blue
		sg		RAL 7032 pebble grey
		gr		RAL 7035 light grey
		ag		RAL 9002 grey white
		sh		RAL 9006 white aluminium
		gs		RAL 9007 grey aluminium
(9)	Paint colour	cw		RAL 9010 pure white

Maine features:

- material of body and cover - aluminium pressure die-castings, max 0.5%Mg
 - service temperature:
T_{serv} = -50÷150°C - silicone rubber
T_{serv} = -20÷200°C - fluoroelastomer rubber
 - maximum space for transmitter: Ø52x30mm
 - coating: yellow chromating (optionally) and chemically resistant paint (outside only)
- Material: aluminium EN AC 44200mod

EN AC 44200mod - the kind of material meets the requirements for use in potentially explosive areas. In addition, it is characterized by increased strength (pressure) parameters, while at the same time shows reduced copper (Cu) concentration.

Ordering example:

(1) (2) (3) (4) (5) (8) (9)
XD-AD 4 - M2/CD - M24/8.1 - SE sh